

PRH5D16A



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

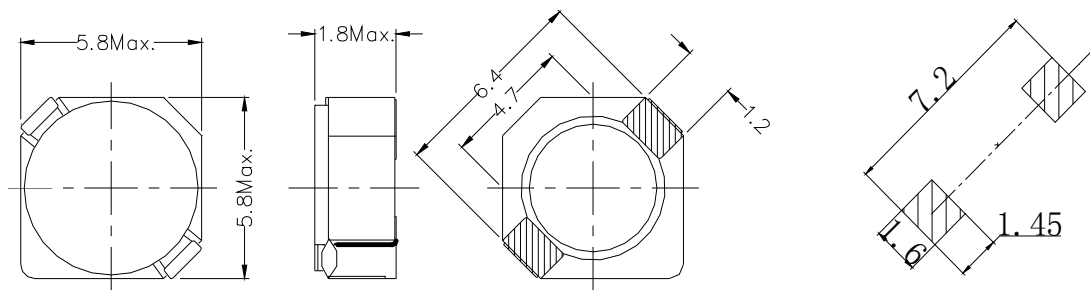

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻(m)	Rated Current(Max) 額定電流(A)
PRH5D1 6A-2R2	2R2	0.9 μ H \pm 25%	53	4.7
PRH5D1 6A-3R3	3R3	3.3 μ H \pm 25%	67	2.2
PRH5D1 6A-4R7	4R7	4.7 μ H \pm 25%	61	2.2
PRH5D1 6A-6R8	6R8	6.8 μ H \pm 25%	80	1.7
PRH5D1 6A-100	100	10 μ H \pm 25%	135	1.45
PRH5D1 6A-150	150	15 μ H \pm 25%	201	1.0
PRH5D1 6A-220	220	22 μ H \pm 25%	300	1.0
PRH5D1 6A-470	470	47 μ H \pm 25%	670	0.6
PRH5D1 6A-101	101	100 μ H \pm 25%	1400	0.45

* SPQ:2000PCS/REEL