

# PRH7D23



### FEATURES 特点

- \* Excellent solderability and high heat resistance  
良好的可焊性和高耐热性


### APPLICATION 用途

- \* DC / DC 转换器

### MEASURING FREQUENCY 测试频率

- \* 100KHz 0.3V

### Shapes And Dimensions 外形及尺寸示意图

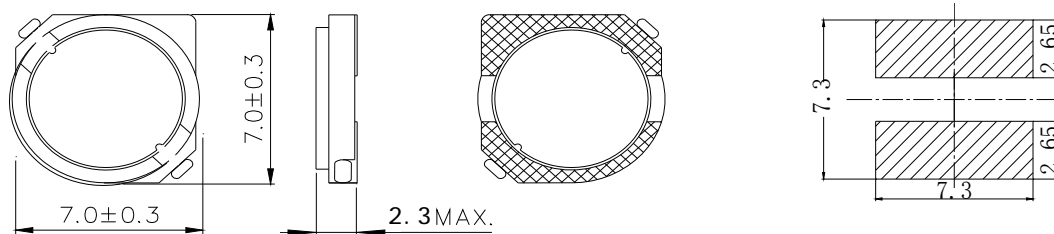

### Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻 (m )	Rated Current(Max) 額定電流 (A)
PRH7D2 3-2R2	2R2	2.2μH±25%	42	2.7
PRH7D2 3-3R3	3R3	3.3μH±25%	51	3.4
PRH7D2 3-4R7	4R7	4.7μH±25%	78	2.8
PRH7D2 3-5R6	5R6	5.6μH±25%	90	2.6
PRH7D2 3-6R8	6R8	6.8μH±25%	110	2.4
PRH7D2 3-8R0	8R0	8.0μH±25%	107	2.2
PRH7D2 3-100	100	10.0μH±25%	137	2.0
PRH7D2 3-120	120	12.0μH±25%	160	2.0
PRH7D2 3-150	150	15.0μH±25%	201	1.6
PRH7D2 3-180	180	18.0μH±25%	231	1.6
PRH7D2 3-220	220	22.0μH±25%	257	1.0

\* SPQ:2000PCS/REEL