

PRH7D28



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

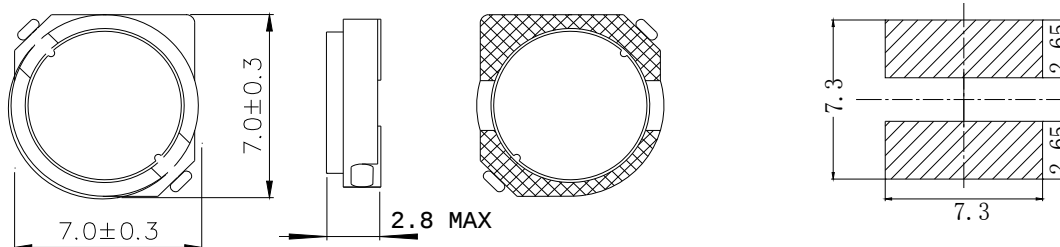

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻(mΩ)	Rated Current(Max) 額定電流(A)
PRH7D2 8-1R8	1R8	1.8±25%	27	4.5
PRH7D2 8-2R7	2R7	2.7±25%	33(26.36m)	4.4
PRH7D2 8-3R3	3R3	3.3±25%	36(31.9m)	4.0
PRH7D2 8-4R3	4R3	4.3±25%	48(42.8m)	3.2
PRH7D2 8-5R0	5R0	5.0±25%	49(44.8m)	3.2
PRH7D2 8-6R2	6R2	6.2±25%	56(53.5m)	2.8
PRH7D2 8-8R7	8R7	8.7±25%	70(63.6m)	2.4
PRH7D2 8-100	100	10±25%	77	2.4
PRH7D2 8-120	120	12±25%	91	2.2
PRH7D2 8-150	150	15±25%	104	1.9
PRH7D2 8-180	180	18±25%	135	1.8
PRH7D2 8-200	200	20±25%	150	1.6
PRH7D2 8-280	280	28±25%	209	1.4
PRH7D2 8-300	300	30±25%	223	1.4
PRH7D2 8-1R8	1R8	1.8±25%	27	5.2
PRH7D2 8-2R7	2R7	30±25%	223	1.3

* SPQ:1500PCS/REEL