

● **FEATURES 特性**

Contain high - frequency ferrite, comparatively large rated current

高频铁氧体

● **APPLICATIONS 用途**


Power supplies, DC-DC converters, TVs, VTRs, Computers; computer Peripherals, Telephones,

Air-Conditioners, Home Electric Appliance, Electronic toys and games.

用于电源, DC-DC转换器; 电视机, 录相机, 计算机; 计算机周边设计; 电话机, 空气调节器,

家用电器, 电动玩具等。

● **SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)**

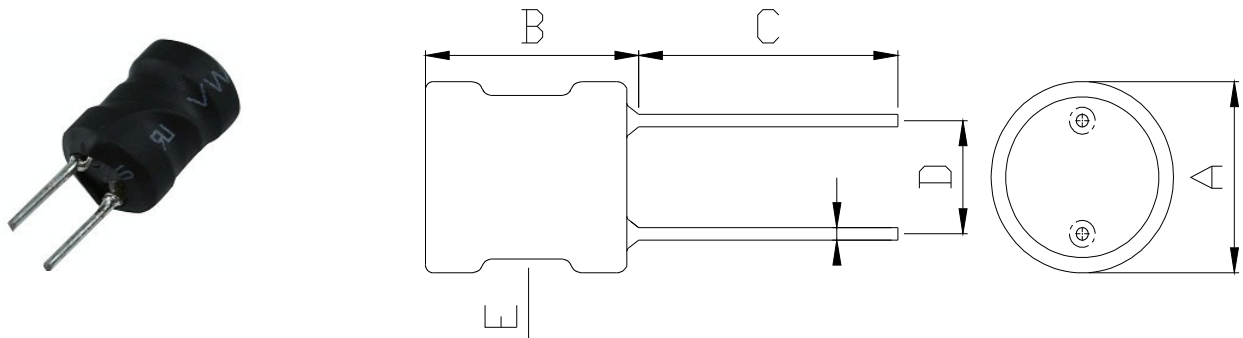

| TYPE(型号) | A | B | C | D | E |
|----------|---------|---------|--------|---------|-----------|
| PK0304 | 4.5Max | 6.5Max | 15±2.0 | 1.5±0.5 | 0.48±0.05 |
| PK0406 | 6.0Max | 9.0Max | 15±2.0 | 2.0±0.5 | 0.48±0.05 |
| PK0507 | 6.5Max | 9.5Max | 15±2.0 | 2.5±0.5 | 0.6±0.05 |
| PK0608 | 8.0Max | 11.0Max | 15±2.0 | 3.0±0.5 | 0.6±0.05 |
| PK0707 | 9.0Max | 10.0Max | 15±2.0 | 5.0±0.5 | 0.6±0.05 |
| PK0810 | 11.0Max | 13.0Max | 15±2.0 | 5.0±0.5 | 0.6±0.05 |
| PK0912 | 12.0Max | 15.0Max | 15±2.0 | 5.0±0.5 | 0.8±0.1 |
| PK1012 | 13.0Max | 16.0Max | 15±2.0 | 6.0±0.5 | 0.8±0.1 |
| PK1016 | 13.0Max | 20.0Max | 15±2.0 | 6.0±0.5 | 0.8±0.1 |
| PK1216 | 15.0Max | 20.0Max | 15±2.0 | 7.5±1.0 | 0.8±0.1 |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK0304-3R3M | 3.3 | 0.20 | 0.55 | 100KHz, 0.25V |
| PK0304-3R9M | 3.9 | 0.22 | 0.50 | 100KHz, 0.25V |
| PK0304-4R7M | 4.7 | 0.25 | 0.45 | 100KHz, 0.25V |
| PK0304-5R6M | 5.6 | 0.30 | 0.40 | 100KHz, 0.25V |
| PK0304-6R8M | 6.8 | 0.30 | 0.38 | 100KHz, 0.25V |
| PK0304-8R2M | 8.2 | 0.35 | 0.35 | 100KHz, 0.25V |
| PK0304-100K | 10 | 0.35 | 0.32 | 1KHz, 0.25V |
| PK0304-120K | 12 | 0.40 | 0.30 | 1KHz, 0.25V |
| PK0304-150K | 15 | 0.50 | 0.28 | 1KHz, 0.25V |
| PK0304-180K | 18 | 0.60 | 0.27 | 1KHz, 0.25V |
| PK0304-220K | 22 | 0.70 | 0.25 | 1KHz, 0.25V |
| PK0304-270K | 27 | 0.80 | 0.24 | 1KHz, 0.25V |
| PK0304-330K | 33 | 0.90 | 0.23 | 1KHz, 0.25V |
| PK0304-390K | 39 | 0.90 | 0.22 | 1KHz, 0.25V |
| PK0304-470K | 47 | 1.0 | 0.20 | 1KHz, 0.25V |
| PK0304-560K | 56 | 1.2 | 0.19 | 1KHz, 0.25V |
| PK0304-680K | 68 | 1.5 | 0.18 | 1KHz, 0.25V |
| PK0304-820K | 82 | 2.0 | 0.17 | 1KHz, 0.25V |
| PK0304-101K | 100 | 3.0 | 0.16 | 1KHz, 0.25V |
| PK0304-121K | 120 | 3.5 | 0.15 | 1KHz, 0.25V |
| PK0304-151K | 150 | 4.0 | 0.15 | 1KHz, 0.25V |
| PK0304-181K | 180 | 5.0 | 0.14 | 1KHz, 0.25V |
| PK0304-221K | 220 | 6.0 | 0.14 | 1KHz, 0.25V |
| PK0304-271K | 270 | 7.0 | 0.13 | 1KHz, 0.25V |
| PK0304-331K | 330 | 8.0 | 0.12 | 1KHz, 0.25V |
| PK0304-391K | 390 | 9.0 | 0.10 | 1KHz, 0.25V |
| PK0304-471K | 470 | 11.0 | 0.08 | 1KHz, 0.25V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK0406 -4R7M | 4.7 | 0.120 | 1.50 | 100KHz, 0.25V |
| PK0406 -5R6M | 5.6 | 0.120 | 1.20 | 100KHz, 0.25V |
| PK0406 -6R8M | 6.8 | 0.130 | 1.00 | 100KHz, 0.25V |
| PK0406 -8R2M | 8.2 | 0.140 | 0.80 | 100KHz, 0.25V |
| PK0406 -100K | 10 | 0.150 | 0.70 | 1KHz,0.25V |
| PK0406 -120K | 12 | 0.180 | 0.60 | 1KHz,0.25V |
| PK0406 -150K | 15 | 0.200 | 0.65 | 1KHz,0.25V |
| PK0406 -180K | 18 | 0.240 | 0.63 | 1KHz,0.25V |
| PK0406 -220K | 22 | 0.260 | 0.60 | 1KHz,0.25V |
| PK0406 -270K | 27 | 0.300 | 0.56 | 1KHz,0.25V |
| PK0406 -330K | 33 | 0.400 | 0.55 | 1KHz,0.25V |
| PK0406 -390K | 39 | 0.500 | 0.52 | 1KHz,0.25V |
| PK0406 -470K | 47 | 0.600 | 0.50 | 1KHz,0.25V |
| PK0406 -560K | 56 | 0.70 | 0.50 | 1KHz,0.25V |
| PK0406 -680K | 68 | 1.00 | 0.48 | 1KHz,0.25V |
| PK0406 -820K | 82 | 1.20 | 0.47 | 1KHz,0.25V |
| PK0406 -101K | 100 | 1.40 | 0.45 | 1KHz,0.25V |
| PK0406 -121K | 120 | 1.50 | 0.40 | 1KHz,0.25V |
| PK0406 -151K | 150 | 1.60 | 0.35 | 1KHz,0.25V |
| PK0406 -181K | 180 | 1.80 | 0.30 | 1KHz,0.25V |
| PK0406 -221K | 220 | 2.00 | 0.24 | 1KHz,0.25V |
| PK0406 -271K | 270 | 2.50 | 0.22 | 1KHz,0.25V |
| PK0406 -331K | 330 | 3.00 | 0.20 | 1KHz,0.25V |
| PK0406 -391K | 390 | 3.30 | 0.18 | 1KHz,0.25V |
| PK0406 -471K | 470 | 3.50 | 0.18 | 1KHz,0.25V |
| PK0406 -561K | 560 | 4.0 | 0.16 | 1KHz,0.25V |
| PK0406 -681K | 680 | 6.0 | 0.15 | 1KHz,0.25V |
| PK0406 -821K | 820 | 7.0 | 0.12 | 1KHz,0.25V |
| PK0406 -102K | 1000 | 9.0 | 0.10 | 1KHz,0.25V |
| PK0406 -122K | 1200 | 12 | 0.09 | 1KHz,0.25V |
| PK0406 -152K | 1500 | 15 | 0.08 | 1KHz,0.25V |
| PK0406 -182K | 1800 | 17 | 0.070 | 1KHz,0.25V |
| PK0406 -222K | 2200 | 22 | 0.070 | 1KHz,0.25V |
| PK0406 -272K | 2700 | 30 | 0.060 | 1KHz,0.25V |
| PK0406 -332K | 3300 | 33 | 0.055 | 1KHz,0.25V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK0507-4R7M | 4.7 | 0.050 | 2.00 | 100KHz, 0.25V |
| PK0507-6R8M | 6.8 | 0.060 | 1.80 | 100KHz, 0.25V |
| PK0507-100K | 10 | 0.080 | 1.60 | 1KHz,0.25V |
| PK0507-120K | 12 | 0.10 | 1.60 | 1KHz,0.25V |
| PK0507-150K | 15 | 0.14 | 1.50 | 1KHz,0.25V |
| PK0507-180K | 18 | 0.15 | 1.20 | 1KHz,0.25V |
| PK0507-220K | 22 | 0.16 | 1.00 | 1KHz,0.25V |
| PK0507-270K | 27 | 0.20 | 0.90 | 1KHz,0.25V |
| PK0507-330K | 33 | 0.30 | 0.80 | 1KHz,0.25V |
| PK0507-390K | 39 | 0.40 | 0.75 | 1KHz,0.25V |
| PK0507-470K | 47 | 0.45 | 0.70 | 1KHz,0.25V |
| PK0507-560K | 56 | 0.50 | 0.65 | 1KHz,0.25V |
| PK0507-680K | 68 | 0.55 | 0.60 | 1KHz,0.25V |
| PK0507-820K | 82 | 0.60 | 0.55 | 1KHz,0.25V |
| PK0507-101K | 100 | 0.80 | 0.50 | 1KHz,0.25V |
| PK0507-121K | 120 | 1.00 | 0.48 | 1KHz,0.25V |
| PK0507-151K | 150 | 1.50 | 0.45 | 1KHz,0.25V |
| PK0507-181K | 180 | 1.80 | 0.42 | 1KHz,0.25V |
| PK0507-221K | 220 | 2.00 | 0.40 | 1KHz,0.25V |
| PK0507-271K | 270 | 2.30 | 0.35 | 1KHz,0.25V |
| PK0507-331K | 330 | 2.60 | 0.30 | 1KHz,0.25V |
| PK0507-391K | 390 | 2.80 | 0.28 | 1KHz,0.25V |
| PK0507-471K | 470 | 3.00 | 0.25 | 1KHz,0.25V |
| PK0507-561K | 560 | 3.50 | 0.25 | 1KHz,0.25V |
| PK0507-681K | 680 | 4.50 | 0.24 | 1KHz,0.25V |
| PK0507-821K | 820 | 5.0 | 0.20 | 1KHz,0.25V |
| PK0507-102K | 1000 | 6.0 | 0.18 | 1KHz,0.25V |
| PK0507-122K | 1200 | 8 | 0.16 | 1KHz,0.25V |
| PK0507-152K | 1500 | 9 | 0.15 | 1KHz,0.25V |
| PK0507-182K | 1800 | 10 | 0.14 | 1KHz,0.25V |
| PK0507-222K | 2200 | 12 | 0.10 | 1KHz,0.25V |
| PK0507-272K | 2700 | 16 | 0.09 | 1KHz,0.25V |
| PK0507-332K | 3300 | 20 | 0.08 | 1KHz,0.25V |
| PK0507-392K | 3900 | 24 | 0.07 | 1KHz,0.25V |
| PK0507-472K | 4700 | 26 | 0.060 | 1KHz,0.25V |
| PK0507-562K | 5600 | 28 | 0.055 | 1KHz,0.25V |
| PK0507-682K | 6800 | 30 | 0.050 | 1KHz,0.25V |
| PK0507-822K | 8200 | 40 | 0.045 | 1KHz,0.25V |
| PK0507-103K | 10000 | 60 | 0.040 | 1KHz,0.25V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK0608-100K | 10 | 0.09 | 2.00 | 1KHz,0.25V |
| PK0608-120K | 12 | 0.10 | 1.90 | 1KHz,0.25V |
| PK0608-150K | 15 | 0.11 | 1.80 | 1KHz,0.25V |
| PK0608-180K | 18 | 0.12 | 1.60 | 1KHz,0.25V |
| PK0608-220K | 22 | 0.12 | 1.50 | 1KHz,0.25V |
| PK0608-270K | 27 | 0.17 | 1.20 | 1KHz,0.25V |
| PK0608-330K | 33 | 0.19 | 1.00 | 1KHz,0.25V |
| PK0608-390K | 39 | 0.22 | 0.95 | 1KHz,0.25V |
| PK0608-470K | 47 | 0.23 | 0.90 | 1KHz,0.25V |
| PK0608-560K | 56 | 0.29 | 0.85 | 1KHz,0.25V |
| PK0608-680K | 68 | 0.37 | 0.80 | 1KHz,0.25V |
| PK0608-820K | 82 | 0.39 | 0.75 | 1KHz,0.25V |
| PK0608-101K | 100 | 0.44 | 0.70 | 1KHz,0.25V |
| PK0608-121K | 120 | 0.64 | 0.65 | 1KHz,0.25V |
| PK0608-151K | 150 | 0.73 | 0.60 | 1KHz,0.25V |
| PK0608-181K | 180 | 0.82 | 0.55 | 1KHz,0.25V |
| PK0608-221K | 220 | 0.92 | 0.50 | 1KHz,0.25V |
| PK0608-271K | 270 | 1.3 | 0.45 | 1KHz,0.25V |
| PK0608-331K | 330 | 1.5 | 0.40 | 1KHz,0.25V |
| PK0608-391K | 390 | 1.8 | 0.35 | 1KHz,0.25V |
| PK0608-471K | 470 | 2.3 | 0.30 | 1KHz,0.25V |
| PK0608-561K | 560 | 3.0 | 0.28 | 1KHz,0.25V |
| PK0608-681K | 680 | 3.25 | 0.25 | 1KHz,0.25V |
| PK0608-821K | 820 | 4.16 | 0.23 | 1KHz,0.25V |
| PK0608-102K | 1000 | 5.00 | 0.21 | 1KHz,0.25V |
| PK0608-122K | 1200 | 6.50 | 0.20 | 1KHz,0.25V |
| PK0608-152K | 1500 | 8.00 | 0.17 | 1KHz,0.25V |
| PK0608-182K | 1800 | 9.00 | 0.16 | 1KHz,0.25V |
| PK0608-222K | 2200 | 9.50 | 0.14 | 1KHz,0.25V |
| PK0608-272K | 2700 | 10.00 | 0.12 | 1KHz,0.25V |
| PK0608-332K | 3300 | 11.00 | 0.10 | 1KHz,0.25V |
| PK0608-392K | 3900 | 13.00 | 0.09 | 1KHz,0.25V |
| PK0608-472K | 4700 | 17.00 | 0.080 | 1KHz,0.25V |
| PK0608-562K | 5600 | 20.00 | 0.070 | 1KHz,0.25V |
| PK0608-682K | 6800 | 27.00 | 0.060 | 1KHz,0.25V |
| PK0608-822K | 8200 | 32.00 | 0.055 | 1KHz,0.25V |
| PK0608-103K | 10000 | 38.00 | 0.050 | 1KHz,0.25V |
| PK0608-123K | 12000 | 43.00 | 0.045 | 1KHz,0.25V |
| PK0608-153K | 15000 | 65.00 | 0.040 | 1KHz,0.25V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK0810-3R3M | 3.3 | 0.04 | 4.20 | 100KHz,0.25V |
| PK0810-3R9M | 3.9 | 0.05 | 4.20 | 100KHz,0.25V |
| PK0810-4R7M | 4.7 | 0.06 | 4.00 | 100KHz,0.25V |
| PK0810-5R6M | 5.6 | 0.06 | 3.80 | 100KHz,0.25V |
| PK0810-6R8M | 6.8 | 0.06 | 3.80 | 100KHz,0.25V |
| PK0810-8R2M | 8.2 | 0.06 | 3.60 | 100KHz,0.25V |
| PK0810-100K | 10 | 0.07 | 3.50 | 1KHz,0.25V |
| PK0810-120K | 12 | 0.08 | 3.20 | 1KHz,0.25V |
| PK0810-150K | 15 | 0.09 | 3.00 | 1KHz,0.25V |
| PK0810-180K | 18 | 0.10 | 2.80 | 1KHz,0.25V |
| PK0810-220K | 22 | 0.12 | 2.50 | 1KHz,0.25V |
| PK0810-270K | 27 | 0.14 | 2.20 | 1KHz,0.25V |
| PK0810-330K | 33 | 0.16 | 2.00 | 1KHz,0.25V |
| PK0810-390K | 39 | 0.16 | 1.80 | 1KHz,0.25V |
| PK0810-470K | 47 | 0.18 | 1.50 | 1KHz,0.25V |
| PK0810-560K | 56 | 0.20 | 1.40 | 1KHz,0.25V |
| PK0810-680K | 68 | 0.23 | 1.30 | 1KHz,0.25V |
| PK0810-820K | 82 | 0.27 | 1.20 | 1KHz,0.25V |
| PK0810-101K | 100 | 0.30 | 1.20 | 1KHz,0.25V |
| PK0810-121K | 120 | 0.33 | 1.00 | 1KHz,0.25V |
| PK0810-151K | 150 | 0.46 | 0.80 | 1KHz,0.25V |
| PK0810-181K | 180 | 0.51 | 0.60 | 1KHz,0.25V |
| PK0810-221K | 220 | 0.62 | 0.55 | 1KHz,0.25V |
| PK0810-271K | 270 | 0.65 | 0.45 | 1KHz,0.25V |
| PK0810-331K | 330 | 0.79 | 0.40 | 1KHz,0.25V |
| PK0810-391K | 390 | 0.91 | 0.40 | 1KHz,0.25V |
| PK0810-471K | 470 | 1.1 | 0.35 | 1KHz,0.25V |
| PK0810-561K | 560 | 1.2 | 0.30 | 1KHz,0.25V |
| PK0810-681K | 680 | 1.5 | 0.28 | 1KHz,0.25V |
| PK0810-821K | 820 | 1.7 | 0.25 | 1KHz,0.25V |
| PK0810-102K | 1000 | 2.0 | 0.22 | 1KHz,0.25V |
| PK0810-122K | 1200 | 2.5 | 0.20 | 1KHz,0.25V |
| PK0810-152K | 1500 | 2.9 | 0.18 | 1KHz,0.25V |
| PK0810-182K | 1800 | 3.5 | 0.15 | 1KHz,0.25V |
| PK0810-222K | 2200 | 4.2 | 0.14 | 1KHz,0.25V |
| PK0810-272K | 2700 | 5.1 | 0.13 | 1KHz,0.25V |
| PK0810-332K | 3300 | 6.1 | 0.12 | 1KHz,0.25V |
| PK0810-392K | 3900 | 7.8 | 0.11 | 1KHz,0.25V |
| PK0810-472K | 4700 | 8.0 | 0.100 | 1KHz,0.25V |
| PK0810-562K | 5600 | 10.0 | 0.095 | 1KHz,0.25V |
| PK0810-682K | 6800 | 14.0 | 0.090 | 1KHz,0.25V |
| PK0810-822K | 8200 | 15.0 | 0.085 | 1KHz,0.25V |
| PK0810-103K | 10000 | 20.0 | 0.080 | 1KHz,0.25V |
| PK0810-123K | 12000 | 22.0 | 0.070 | 1KHz,0.25V |
| PK0810-153K | 15000 | 24.0 | 0.060 | 1KHz,0.25V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK0912-100K | 10 | 0.04 | 4.00 | 1KHz,0.25V |
| PK0912-120K | 12 | 0.045 | 3.80 | 1KHz,0.25V |
| PK0912-150K | 15 | 0.05 | 3.50 | 1KHz,0.25V |
| PK0912-180K | 18 | 0.06 | 3.20 | 1KHz,0.25V |
| PK0912-220K | 22 | 0.07 | 3.00 | 1KHz,0.25V |
| PK0912-270K | 27 | 0.10 | 2.80 | 1KHz,0.25V |
| PK0912-330K | 33 | 0.12 | 2.50 | 1KHz,0.25V |
| PK0912-390K | 39 | 0.12 | 2.00 | 1KHz,0.25V |
| PK0912-470K | 47 | 0.13 | 1.90 | 1KHz,0.25V |
| PK0912-560K | 56 | 0.14 | 1.80 | 1KHz,0.25V |
| PK0912-680K | 68 | 0.15 | 1.70 | 1KHz,0.25V |
| PK0912-820K | 82 | 0.16 | 1.60 | 1KHz,0.25V |
| PK0912-101K | 100 | 0.25 | 1.50 | 1KHz,0.25V |
| PK0912-121K | 120 | 0.28 | 1.20 | 1KHz,0.25V |
| PK0912-151K | 150 | 0.30 | 1.00 | 1KHz,0.25V |
| PK0912-181K | 180 | 0.45 | 0.70 | 1KHz,0.25V |
| PK0912-221K | 220 | 0.50 | 0.60 | 1KHz,0.25V |
| PK0912-271K | 270 | 0.65 | 0.50 | 1KHz,0.25V |
| PK0912-331K | 330 | 0.85 | 0.45 | 1KHz,0.25V |
| PK0912-391K | 390 | 0.95 | 0.40 | 1KHz,0.25V |
| PK0912-471K | 470 | 1.1 | 0.35 | 1KHz,0.25V |
| PK0912-561K | 560 | 1.2 | 0.30 | 1KHz,0.25V |
| PK0912-681K | 680 | 1.3 | 0.25 | 1KHz,0.25V |
| PK0912-821K | 820 | 1.5 | 0.20 | 1KHz,0.25V |
| PK0912-102K | 1000 | 2.0 | 0.20 | 1KHz,0.25V |
| PK0912-122K | 1200 | 2.3 | 0.18 | 1KHz,0.25V |
| PK0912-152K | 1500 | 2.9 | 0.17 | 1KHz,0.25V |
| PK0912-182K | 1800 | 3.3 | 0.16 | 1KHz,0.25V |
| PK0912-222K | 2200 | 4.5 | 0.15 | 1KHz,0.25V |
| PK0912-272K | 2700 | 5.5 | 0.14 | 1KHz,0.25V |
| PK0912-332K | 3300 | 5.7 | 0.13 | 1KHz,0.25V |
| PK0912-392K | 3900 | 6.5 | 0.12 | 1KHz,0.25V |
| PK0912-472K | 4700 | 7.2 | 0.12 | 1KHz,0.25V |
| PK0912-562K | 5600 | 9.5 | 0.11 | 1KHz,0.25V |
| PK0912-682K | 6800 | 12 | 0.10 | 1KHz,0.25V |
| PK0912-822K | 8200 | 14 | 0.10 | 1KHz,0.25V |
| PK0912-103K | 10000 | 16 | 0.09 | 1KHz,0.25V |
| PK0912-123K | 12000 | 18 | 0.09 | 1KHz,0.25V |
| PK0912-153K | 15000 | 21 | 0.08 | 1KHz,0.25V |
| PK0912-183K | 18000 | 25 | 0.08 | 1KHz,0.25V |
| PK0912-223K | 22000 | 33 | 0.07 | 1KHz,0.25V |
| PK0912-273K | 27000 | 40 | 0.05 | 1KHz,0.25V |
| PK0912-333K | 33000 | 45 | 0.04 | 1KHz,0.25V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK1012-3R3M | 3.3 | 0.025 | 5.5 | 100KHz,0.45V |
| PK1012-3R9M | 3.9 | 0.030 | 5.0 | 100KHz,0.45V |
| PK1012-4R7M | 4.7 | 0.030 | 5.0 | 100KHz,0.45V |
| PK1012-5R6M | 5.6 | 0.040 | 4.8 | 100KHz,0.45V |
| PK1012-6R8M | 6.8 | 0.040 | 4.8 | 100KHz,0.45V |
| PK1012-8R2M | 8.2 | 0.045 | 4.5 | 100KHz,0.45V |
| PK1012-100K | 10 | 0.050 | 4.2 | 1KHz,0.45V |
| PK1012-120K | 12 | 0.050 | 4.0 | 1KHz,0.45V |
| PK1012-150K | 15 | 0.060 | 3.8 | 1KHz,0.45V |
| PK1012-180K | 18 | 0.070 | 3.8 | 1KHz,0.45V |
| PK1012-220K | 22 | 0.080 | 3.5 | 1KHz,0.45V |
| PK1012-270K | 27 | 0.090 | 3.2 | 1KHz,0.45V |
| PK1012-330K | 33 | 0.100 | 3.0 | 1KHz,0.45V |
| PK1012-390K | 39 | 0.120 | 2.5 | 1KHz,0.45V |
| PK1012-470K | 47 | 0.120 | 2.0 | 1KHz,0.45V |
| PK1012-560K | 56 | 0.140 | 1.8 | 1KHz,0.45V |
| PK1012-680K | 68 | 0.150 | 1.7 | 1KHz,0.45V |
| PK1012-820K | 82 | 0.160 | 1.6 | 1KHz,0.45V |
| PK1012-101K | 100 | 0.180 | 1.5 | 1KHz,0.45V |
| PK1012-121K | 120 | 0.200 | 1.4 | 1KHz,0.45V |
| PK1012-151K | 150 | 0.250 | 1.2 | 1KHz,0.45V |
| PK1012-181K | 180 | 0.280 | 1.0 | 1KHz,0.45V |
| PK1012-221K | 220 | 0.300 | 0.90 | 1KHz,0.45V |
| PK1012-271K | 270 | 0.420 | 0.80 | 1KHz,0.45V |
| PK1012-331K | 330 | 0.550 | 0.70 | 1KHz,0.45V |
| PK1012-391K | 390 | 0.600 | 0.60 | 1KHz,0.45V |
| PK1012-471K | 470 | 0.650 | 0.55 | 1KHz,0.45V |
| PK1012-561K | 560 | 0.750 | 0.50 | 1KHz,0.45V |
| PK1012-681K | 680 | 0.850 | 0.50 | 1KHz,0.45V |
| PK 1012-821K | 820 | 1.100 | 0.40 | 1KHz,0.45V |
| PK1012-102K | 1000 | 1.400 | 0.30 | 1KHz,0.45V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK1016-4R7M | 4.7 | 0.020 | 5.8 | 100KHz,0.25V |
| PK1016-5R6M | 5.6 | 0.025 | 5.5 | 100KHz,0.25V |
| PK1016-6R8M | 6.8 | 0.025 | 5.4 | 100KHz,0.25V |
| PK1016-8R2M | 8.2 | 0.028 | 5.2 | 100KHz,0.25V |
| PK1016-100K | 10 | 0.035 | 5.0 | 1KHz,0.25V |
| PK1016-120K | 12 | 0.035 | 4.5 | 1KHz,0.25V |
| PK1016-150K | 15 | 0.040 | 4.0 | 1KHz,0.25V |
| PK1016-180K | 18 | 0.060 | 4.0 | 1KHz,0.25V |
| PK1016-220K | 22 | 0.080 | 3.8 | 1KHz,0.25V |
| PK1016-270K | 27 | 0.100 | 3.5 | 1KHz,0.25V |
| PK1016-330K | 33 | 0.100 | 3.5 | 1KHz,0.25V |
| PK1016-390K | 39 | 0.120 | 3.2 | 1KHz,0.25V |
| PK1016-470K | 47 | 0.120 | 3.0 | 1KHz,0.25V |
| PK1016-560K | 56 | 0.130 | 2.8 | 1KHz,0.25V |
| PK1016-680K | 68 | 0.140 | 2.5 | 1KHz,0.25V |
| PK1016-820K | 82 | 0.150 | 2.2 | 1KHz,0.25V |
| PK1016-101K | 100 | 0.180 | 2.0 | 1KHz,0.25V |
| PK1016-121K | 120 | 0.200 | 1.8 | 1KHz,0.25V |
| PK1016-151K | 150 | 0.220 | 1.6 | 1KHz,0.25V |
| PK1016-181K | 180 | 0.250 | 1.5 | 1KHz,0.25V |
| PK1016-221K | 220 | 0.300 | 1.5 | 1KHz,0.25V |
| PK1016-271K | 270 | 0.350 | 1.4 | 1KHz,0.25V |
| PK1016-331K | 330 | 0.600 | 1.3 | 1KHz,0.25V |
| PK1016-391K | 390 | 0.700 | 1.2 | 1KHz,0.25V |
| PK1016-471K | 470 | 0.800 | 1.0 | 1KHz,0.25V |
| PK1016-561K | 560 | 0.900 | 1.0 | 1KHz,0.25V |
| PK1016-681K | 680 | 1.000 | 0.9 | 1KHz,0.25V |
| PK1016-821K | 820 | 1.200 | 0.8 | 1KHz,0.25V |
| PK1016-102K | 1000 | 1.500 | 0.7 | 1KHz,0.25V |

● SPECIFICATION TABLE:

| PART NUMBER 品名 | INDUCTANCE (μ H) 电感值 | DCR (Max.) (Ω) 直流电阻 | Idc (Max.) (A) 额定电流 | TEST FREQUENCY 测试频率 |
|-------------------|---------------------------------|------------------------------------|---------------------------|------------------------|
| PK 1216-330K | 33 | 0.08 | 5.0 | 1KHz,0.25V |
| PK 1216-390K | 39 | 0.10 | 4.5 | 1KHz,0.25V |
| PK 1216-470K | 47 | 0.11 | 4.2 | 1KHz,0.25V |
| PK 1216-560K | 56 | 0.12 | 4.0 | 1KHz,0.25V |
| PK 1216-680K | 68 | 0.13 | 3.5 | 1KHz,0.25V |
| PK 1216-820K | 82 | 0.14 | 3.3 | 1KHz,0.25V |
| PK 1216-101K | 100 | 0.15 | 3.2 | 1KHz,0.25V |
| PK 1216-121K | 120 | 0.16 | 3.0 | 1KHz,0.25V |
| PK 1216151K | 150 | 0.17 | 2.7 | 1KHz,0.25V |
| PK 1216181K | 180 | 0.18 | 2.5 | 1KHz,0.25V |
| PK 1216-221K | 220 | 0.20 | 2.3 | 1KHz,0.25V |
| PK 1216-271K | 270 | 0.30 | 2.0 | 1KHz,0.25V |
| PK 1216-331K | 330 | 0.40 | 1.9 | 1KHz,0.25V |
| PK 1216-391K | 390 | 0.50 | 1.8 | 1KHz,0.25V |
| PK 1216-471K | 470 | 0.60 | 1.7 | 1KHz,0.25V |
| PK 1216-561K | 560 | 0.70 | 1.6 | 1KHz,0.25V |
| PK 1216-681K | 680 | 0.80 | 1.5 | 1KHz,0.25V |
| PK 1216-821K | 820 | 0.90 | 1.4 | 1KHz,0.25V |
| PK 1216-102K | 1000 | 1.00 | 1.3 | 1KHz,0.25V |
| PK 1216-152K | 1500 | 1.50 | 1.0 | 1KHz,0.25V |
| PK 1216-182K | 1800 | 2.00 | 0.8 | 1KHz,0.25V |
| PK 1216-222K | 2200 | 3.00 | 0.7 | 1KHz,0.25V |
| PK 1216-272K | 2700 | 4.50 | 0.6 | 1KHz,0.25V |
| PK 1216-332K | 3300 | 6.00 | 0.5 | 1KHz,0.25V |